al kout industrial projects
الكوت للمشاريع الصناعية

Purchase Order

PO No : PO2026-126110119

Order Date : 27/02/2026

Vendor : V00705 Trust Factory for Fabrication & Production Of Containers
P.O. Box: 55033, Sabhiya Code: 54561

Fax :

Supplier Ref : TF/Alkout/102 Rev 2

Attention : Mohammad Shamshad Farooqui 650495

Basis of Price : FRANCO

Ship Via : Local

Payment Terms : Against invoices

Ph. No :

Delivery Time : 25/05/2026

Dear Sir/Madam,

CS SALT SATURATOR TK-102

We thank for your above referenced quotation and are pleased to issue our above Purchase Order in accordance with the details indicated here under.

Line Number	Vocab No.	Description	Quantity	Units	Unit Cost (KWD)	Discount	Total Cost (KWD)
1	21500034	Fabrication and supply of carbon steel Salt Saturator TK-102	1.00		48,470.0000	0.000	48,470.000
						Total Amount	**48,470.000**
						PO Total Cost	**48,470.000**

IMPORTANT

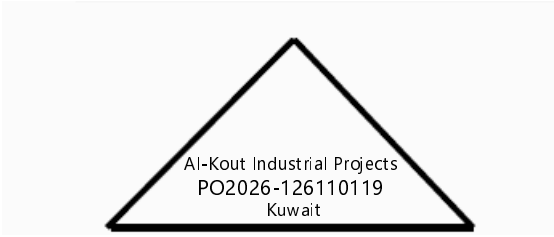

SHIPPING MARK

This is an approved computer generated purchase order (Status Approved)

مصنع الكوت لإنتاج الملح والكلورين +965 2228-4042 +965 2228-6668 السجل التجاري 57360 رأس المال المصرح به و المدفوع 8820000 دينار كويتي

C. R. No. 57360 Authorized & Paid-up Capital K.D. 8,820,000 • Tel: +965 2228-6668 • Fax: +965 2228-4042 • Al Kout Plant for Salt & Chlorine Productions

www.alkoutprojects.com

al kout industrial projects
الكوت للمشاريع الصناعية

Purchase Order

Terms & Conditions:

1. The purchase order no. must appear on all Vendor Documents (Invoices, Delivery Note, etc.)
2. This purchase order shall be confirmed within 2 working days otherwise it will be treated as confirmed by your side.
3. The supplied items shall be free from defects/damages and shall be in good condition.
4. In case of rejections, you will repair/replace or refund the value of the goods (in case any payment is made). The rejected material will be stored at your risk for not more than 30 days from the date of rejection and returned at your cost.
5. Delivery: Delivery of the materials within 12 weeks from the PO and advance payment. M/s Trust shall arrange the delivery of the tank at AIP premises.
6. Payment: 35% payment against the proforma invoice, 50% payment shall be released as progressive payment and 15% after completion of work.
7. M/s Trust shall carry out the work in line with AIP requirements.
8. Tank Specification: Code of construction : API 650 12th Edition March 2013 Addendum -2 Jan2016, Capacity: 98 M3, Size of the tank : Diameter 3500 mm x 8900 mm height Bottom (Flat) : Diameter 3500 x 14 mm, Top Cover (Conical) 9.460 : Diameter 5454 mm, Shell size : 8900 mm Height x 12 mm, Manhole : As per DWG, Nozzle : as per client requirements, Reinforcement angle : as per AIP requirements, Material of construction : A36, Material of Construction (Top Plate): SS316, Material of Construction (Stairs, Handrail and Platform) : SS314, Tank ladder and handrail material : A36, Platform, ladder and handrail : Blasting: shall be done with garnet to achieve surface, roughness SA2 and Painting: External Shell be Painted with Prime Coat: Hempel Epoxy Primer 15300 (OR) Equivalent, Secondary Coat: Hempadur Mastic 45880 RAL 7002 (OR) Equivalent.
9. Insulation and Cladding shall be on M/s AIP Scope.
10. M/s. Trust shall submit the design and detailed engineering drawings for M/s. AIP's review and approval prior to fabrication, within three (3) days of receipt of the Purchase Order.

11. All rubber lining supporting services including support manpower, material storage in A/c Facility, blasting, scaffolding, transportation of Personnel (≈ 5 persons), tools for RL work and temporary 2 Ton boiler arrangement and utilities for boiler for curing of RL.
12. All surface preparation to SA 2 ½ for RL. Any additional corrective surface preparation works for rubber lining based on inspection by R/L Crew shall be done by M/s. Trust at no extra cost.
13. Erection and dismantling of scaffolding shall be provided as many times as necessary for surface preparation, inspection, rubber lining as well as any post-vulcanization rubber lining repairs etc.
14. Complete Tank after RL and testing, Blind flanges, Platform Plates materials shall be transported to AIP site with necessary preservation (including temporary padded bracings/support to avoid buckling of rubber lining), Internal support and preparation for transport shall be provided for all items, ensuring packing suitable for road transport, multiple handling, and outdoor storage. including required equipment, traffic permits, police coordination etc.
15. M/s. Trust must submit the welding procedure specifications (WPS) , Procedure Qualification Record(PQR) & welder qualification test (WQT) within 4 days from the date of receipt of purchase order for M/S. AIP review & approval.
16. Spare gaskets and fasteners shall be supplied as per SOW.
17. Supply of anchor bolts shall be included within the SOW.
18. Water fill test shall be carried out prior to rubber lining (RL) to ensure the integrity of the tank.
19. The Quality Assurance Plan (QAP) and all applicable Inspection and Test Plans (ITPs) for the fabrication, inspection, and testing of the tank shall be submitted for review and approval prior to commencement of work.
20. M/s. Trust shall allow AIP personnel to access the fabrication site at any time for stagewise inspection of work.
21. Any leftover rubber lining material shall be handed over to AIP.
22. M/s. Trust must supply necessary material, machine, manpower, tools and tackles, consumables & storage containers to complete the scope of work without any additional charges to M/S. AIP.
23. M/s. Trust shall submit the Work Schedule, Method Statement for AIP's review and approval prior to execution.
24. M/s. Trust shall submit a Material Approval Request (MAR) / (MIR) and WIR for AIP review and approval. (Material must not be older than five (5) years)
25. M/s. Trust shall submit Final AS-BUILT drawing, complete dossier (including MTC,MAR/MIR,WIR etc) and all drawings as mentioned in supplier document requirement list after completion of work.
26. Warranty: 12 months from the date of commissioning or 18 months from the date of supply, whichever is earlier.
27. Gate pass costs (for personnel, vehicles, materials, and equipment) shall be under the Contractor's responsibility. AIP will support in arranging the gate passes.
28. The following Documents shall become Integral Part of this Purchase Order

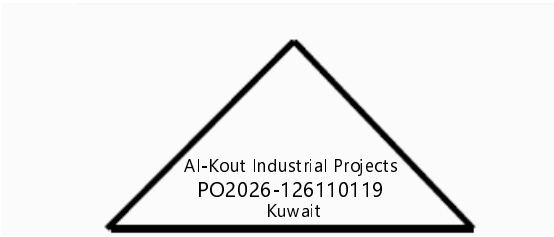

SHIPPING MARK

This is an approved computer generated purchase order (Status Approved)

مصنع الكوت لإنتاج الملح والكلورين +965 2228-4042 +965 2228-6668 السجل التجاري 57360 رأس المال المصرح به و المدفوع 8820000 دينار كويتي

al kout industrial projects
الكوت للمشاريع الصناعية

Purchase Order

- Scope of work for Ref EC-PE-P-003-A-13 Rev.1 Dtd. 22 -Dec -25.
- M/s Trust offer ref# TF/Alkout/102 Rev 2

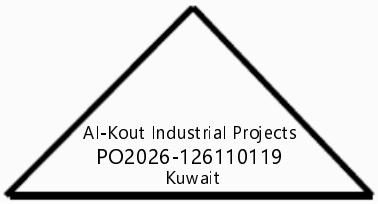

SHIPPING MARK

This is an approved computer generated purchase order (Status Approved)

مصنع الكوت لإنتاج الملح والكلورين +965 2228-4042 +965 2228-6668 السجل التجاري 57360 رأس المال المصرح به و المدفوع 8820000 دينار كويتي

C. R. No. 57360 Authorized & Paid-up Capital K.D. 8,820,000 • Tel: +965 2228-6668 • Fax: +965 2228-4042 • Al Kout Plant for Salt & Chlorine Productions

www.alkoutprojects.com